


# Performa Light™

**FICHA TÉCNICA**

## FOLDING REVERSO BLANCO

### 1 ▲ Estructura del cartón / *structure du carton*

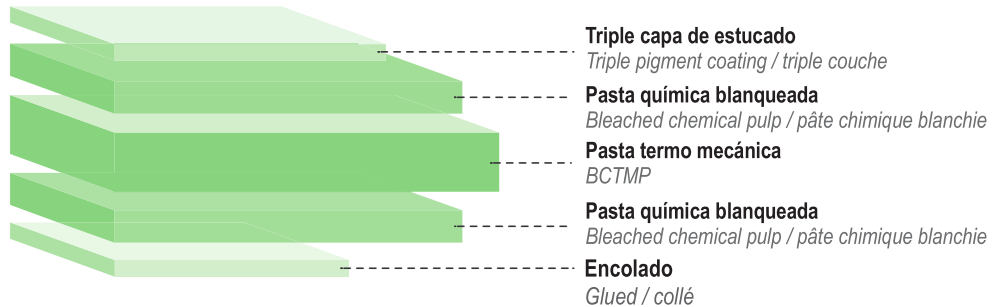

### 2 ▲ Especificaciones técnicas

GRAMAJE <i>GRAMMAGE / GRAMMAGE</i>	ESPESOR <i>THICKNESS / ÉPAISSEUR</i>	RIGIDEZ TABER <i>STIFFNESS / RIGIDITÉ</i>	
		CD	MD
<b>g/m ±4%</b>	<b>µm ( ±5%)</b>	<b>(±15%)</b>	
240	410	7.5	16.6
250	430	8.7	19.2
260	450	9.7	21.2
275	480	11.4	25.7
285	500	12.8	28.2

### 3 ▲ Aplicaciones



### 4 ▲ Propiedades


<b>BLANCURA DE LA CARA ESTUCADA %</b> <i>BRIGHTNESS TOP % / BLANCHURE RECTO %</i>	91,5	ISO 2470-1
<b>BLANCURA DEL REVERSO</b> <i>BRIGHTNESS BOTTOM % / BLANCHURE VERSO %</i>	84	ISO 2470-1
<b>BRILLO 75 %</b> <i>GLOSS / BRILLANCE</i>	40	ISO 8254-1
<b>LISURA</b> <i>ROUGHNESS / LISSAGE</i>	1	ISO 8791-4
<b>TEST ROBINSON</b>	GARANTIZADO POR UN AÑO	

# Performa Bright™

FICHA TÉCNICA

## FOLDING REVERSO BLANCO

### 1 ▲ Estructura del cartón / *structure du carton*

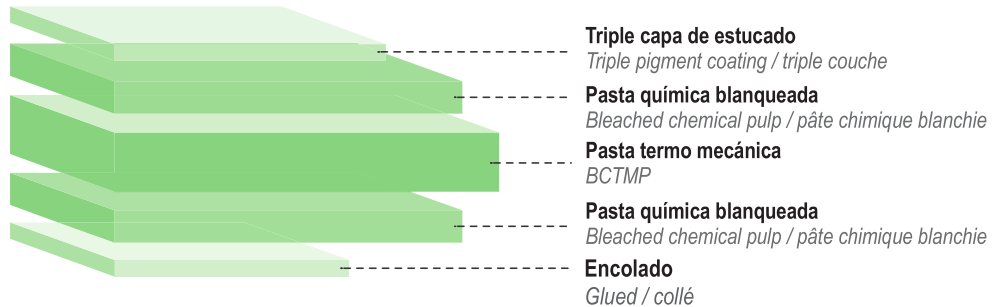

### 2 ▲ Especificaciones técnicas

GRAMAJE <i>GRAMMAGE / GRAMMAGE</i>	ESPESOR <i>THICKNESS / ÉPAISSEUR</i>	RIGIDEZ TABER <i>STIFFNESS / RIGIDITÉ</i>	
		(±15%)	
g/m ±4%	µm (±5%)	CD	MD
225	350	5.1	12.6
235	380	5.8	15.0
250	415	7.7	18.6
260	430	8.2	21.0
270	450	9.4	23.2
285	485	11.1	27.3
295	505	13.1	29.7
320	560	14.7	36.2
355	625	18.4	44.2

### 3 ▲ Aplicaciones



### 4 ▲ Propiedades

<b>BLANCURA DE LA CARA ESTUCADA %</b> <i>BRIGHTNESS TOP % / BLANCHURE RECTO %</i>	90	ISO 2470-1
<b>BLANCURA DEL REVERSO</b> <i>BRIGHTNESS BOTTOM % / BLANCHURE VERSO %</i>	82	ISO 2470-1
<b>BRILLO 75 %</b> <i>GLOSS / BRILLANCE</i>	45	ISO 8254-1
<b>LISURA</b> <i>ROUGHNESS / LISSAGE</i>	1	ISO 8791-4
<b>TEST ROBINSON</b>	GARANTIZADO POR UN AÑO	