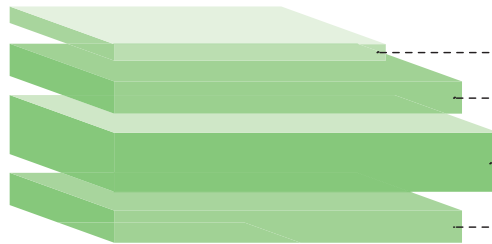


ALASKA STRONG

FICHA TÉCNICA

FOLDING REVERSO MADERA (GC2)

1 ▲ Estructura del cartón / structure du carton


Estucado multiple (con pigmento)
Multiple pigment coating
Pasta química blanqueada
Bleached chemical pulp / pâte chimique blanchie
Pasta Termo Mecánica BCTMP
Thermo Mechanical pulp / pâte thermo mécanique
Pasta química blanqueada
Bleached chemical pulp / pâte chimique blanchie


2 ▲ Especificaciones técnicas

GRAMAJE <i>GRAMMAGE / GRAMMAGE</i>	ESPESOR <i>THICKNESS / ÉPAISSEUR</i>	RIGIDEZ TABER <i>STIFFNESS / RIGIDITÉ</i>	
		CD	MD
g/m ±3%	µm (±4%)	(±15%)	
200	350	5.0	10.3
210	375	5.9	12.4
225	400	7.2	14.4
235	425	8.2	16.4
245	450	9.3	18.6
260	480	11.0	22.0
270	500	12.3	24.6
290	550	15.5	30.5
310	600	18.5	36.4
340	650	22.0	45.0
360	695	27.0	52.0
380	740	31.0	61.0

3 ▲ Aplicaciones



Farmacia



Alimentación



Chocolates



Cosméticos

4 ▲ Propiedades

BLANCURA DE LA CARA ESTUCADA % <i>BRIGHTNESS TOP % / BLANCHURE RECTO %</i>	87	ISO 2470-2
CERTIFICACIONES <i>CERTIFICATIONS / CERTIFICATIONS</i>	FSC, PEFC	ISO 9001, ISO 22000, ISO 14001, ISO 45001
BRILLO 75 % <i>GLOSS / BRILLANCE</i>	>30	ISO 8254
LISURA <i>ROUGHNESS / LISSAGE</i>	≤1,6	ISO 8791-4