


# Ensocoat 2S™

**FICHA TÉCNICA**

## CARTULINA ESTUCADA 2 CARAS

### 1 ▲ Estructura del cartón / *structure du carton*

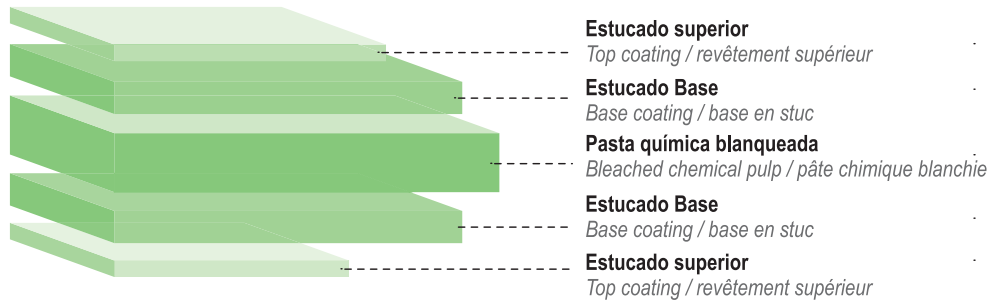

### 2 ▲ Especificaciones técnicas

GRAMAJE <i>GRAMMAGE / GRAMMAGE</i>	ESPESOR <i>THICKNESS / ÉPAISSEUR</i>	RIGIDEZ TABER <i>STIFFNESS / RIGIDITÉ</i>	
		CD	MD
<b>g/m ±4%</b>	<b>µm ( ±4%)</b>	<b>(±15%)</b>	
220	230	2.3	4.1
240	255	2.9	6.3
270	290	4.3	9.2
300	330	6.3	12.6
330	360	8.2	16.9
350	400	10.4	21.3
400	450	15.0	31.4

### 3 ▲ Aplicaciones



### 4 ▲ Propiedades

<b>BLANCURA DE LA CARA ESTUCADA %</b> <i>BRIGHTNESS TOP %</i>	95	ISO 2470-1
<b>BRILLO 75 %</b> <i>GLOSS</i>	48	ISO 8254-1
<b>TEST ROBINSON</b>	GARANTIZADO POR UN AÑO	