


Ensocoat™

FICHA TÉCNICA

CARTULINA ESTUCADA 1 CARA

1 ▲ Estructura del cartón / *structure du carton*

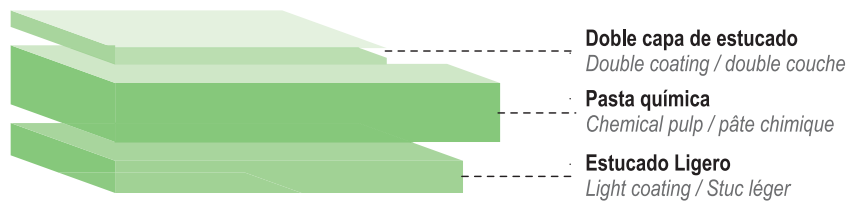

2 ▲ Especificaciones técnicas

GRAMAJE <i>GRAMMAGE / GRAMMAGE</i>	ESPESOR <i>THICKNESS / ÉPAISSEUR</i>	RIGIDEZ TABER <i>STIFFNESS / RIGIDITÉ</i>	
		(±15%)	
g/m ±4%	µm (±4%)	CD	MD
190	200	1.7	3.6
210	230	2.4	5.1
220	265	3.0	6.0
230	270	3.6	7.7
250	300	4.8	10.1
275	330	6.3	13.0
300	365	8.7	18.1
330	415	11.6	24.2
350	445	13	28.0
380	485	16.9	35.7

3 ▲ Aplicaciones



4 ▲ Propiedades

BLANCURA DE LA CARA ESTUCADA % <i>BRIGHTNESS TOP % / BLANCHURE RECTO %</i>	95	ISO 2470-1
BRILLO 75 % <i>GLOSS / BRILLANCE</i>	48	ISO 8254-1
TEST ROBINSON	GARANTIZADO POR UN AÑO	